


Product End-of-Life Instructions

Rack Rail Kit

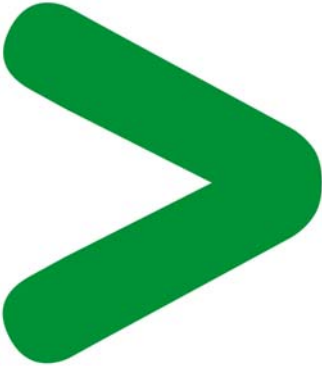

Product End-of-Life Instructions – EoLI

Product overview

Product Range: Rack Rail Kits

Marketing Model/Name: SURTRK(X), SRTRK(X), IBMRK(X), RWRTRK(X), NECRTRK(X) where X is a number between 1-20, AP9625, SRAILKIT, SPRK60KG-2U, SPRK100KG-3U, 0H-0315, 0M-1012A, 0J-0M-1012A, 0J-0082, 0J-0083, 0M-1876.2, 0M-8208, 0M-8833A and RWDR001.

Size: H x L x D in mm = 44 x 527 x 89

Weight in g = range is from 3,000 g and 6,925 g including packaging. It is 5,657 g for the Smart-UPS Rail Kits (SURTRK).

Purpose

The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.

Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse → Separation for special treatment → Other dismantling → Shredding

CAUTION:


The components of the products that optimize the recycling performances are listed, identified and located hereunder.

Disassembly Instructions:

1. Remove electronic and other equipment from the rack and the rack rail kit per the manufacturers' instructions. '
2. Disassemble remaining rail kit and place into the appropriate recycling waste stream.

Product End-of-Life Instructions – EoLI

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

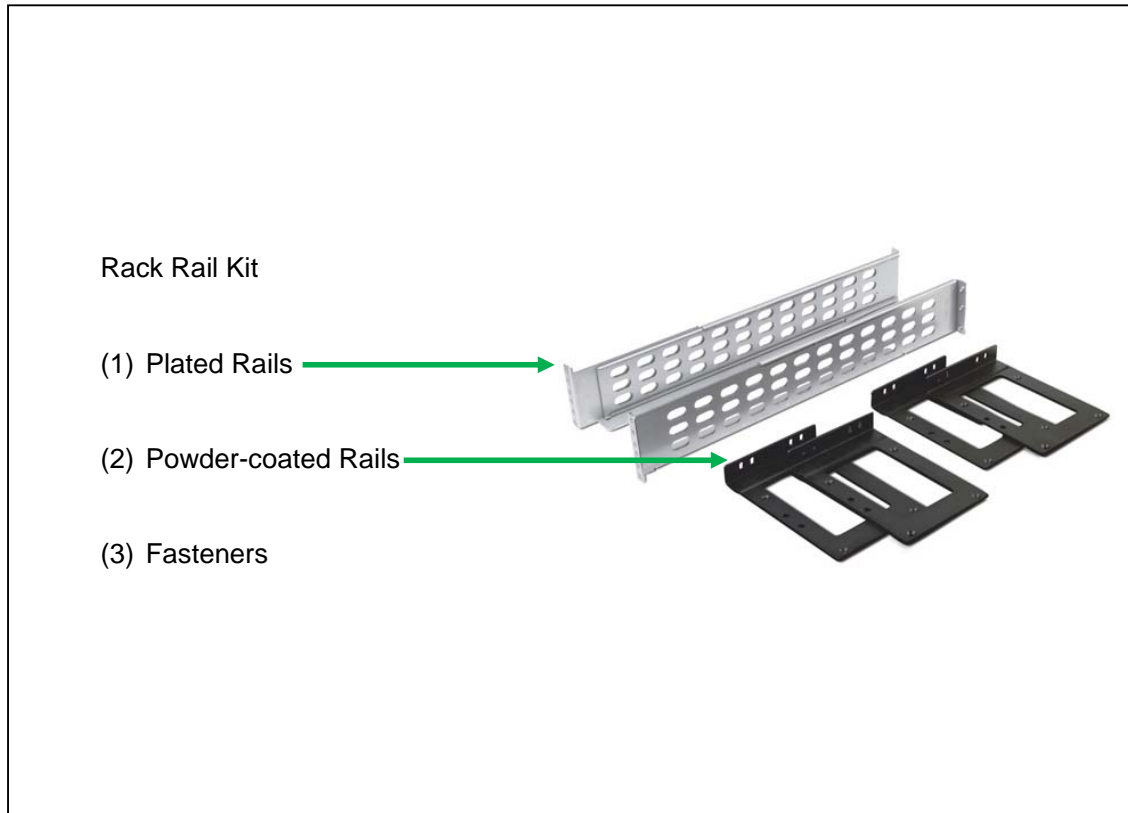

Rack Rail Kits product range consist of the following typical parts: (1) galvanized and plated steel components, (2) powder-coated steel components and (3) miscellaneous hardware (fasteners and bumpers).

Recommendation	Number on drawing	Components	Weight (in g)	Comment
Special treatment	(1), (2)	Plated or powder-coated metal rails	1800 – 6200 each	Cold Rolled Steel

For more information please go to: <http://www.apc.com/recycle/>

EoLI achieved with Schneider-Electric TT03 V5 procedure

Schneider Electric Industries SAS

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com